





Cable entry plate plastic type KDP/F 24



Product information

Very flat plastic cable entry plate

Enormous time savings in assembly
High packing density
Large wire diameter ranges
Several cables may be fed through an opening together
no strain relief

Protection class: IP 65
Fire classification: HB
Thermal stability: -30 °C to +70 °C
Material: Frame: Polypropylene (PP) / Seal: TPE
RoHS Compliant
UV-resistant
Made in Germany

Suitable for standard cut-outs for 24-pin industrial connectors
Assembly with clips or M5 screws possible


Information, conformities and approvals



Article	Order No.	Color	No. of openings	Openings number/Ø	Cut-out	PU pcs.
KDP/F 24-14	87302010	Black	14	6x 0 mm - 9 mm 4x 0 mm - 11 mm 4x 0 mm - 18 mm	24-pole	1
KDP/F 24-14, PU 100	87302011	Black	14	6x 0 mm - 9 mm 4x 0 mm - 11 mm 4x 0 mm - 18 mm	24-pole	100
KDP/F 24-22	87302020	Black	22	16x 0 mm - 9 mm 4x 0 mm - 11 mm 2x 0 mm - 15 mm	24-pole	1
KDP/F 24-22, PU 100	87302021	Black	22	16x 0 mm - 9 mm 4x 0 mm - 11 mm 2x 0 mm - 15 mm	24-pole	100
KDP/F 24-28	87302040	Black	28	28x - 9 mm	24-pole	1
KDP/F 24-28, PU 100	87302041	Black	28	28x - 9 mm	24-pole	100
KDP/F 24-46	87302050	Black	46	46x - 6.5 mm	24-pole	1
KDP/F 24-46, PU 100	87302051	Black	46	46x - 6.5 mm	24-pole	100
KDP/F 24-multi	87302030	Black	3	3x 0 mm - 27 mm	24-pole	1
KDP/F 24-multi, VE 100	87302031	Black	3	3x 0 mm - 27 mm	24-pole	100



Cable entry plate plastic type KDP/F 24

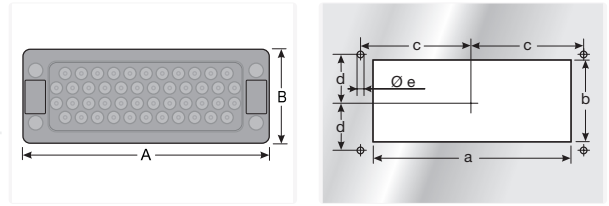

Cable entry plate KDP rectangular dimension table

Article	Order No.	Installation height mm	A mm	B mm	a mm	b mm	c mm	d mm	e mm
KDP/F 24-14	87302010	10	148	60	112	36	65	16	5.5
KDP/F 24-14, PU 100	87302011	10	148	60	112	36	65	16	5.5
KDP/F 24-22	87302020	10	148	60	112	36	65	16	5.5
KDP/F 24-22, PU 100	87302021	10	148	60	112	36	65	16	5.5
KDP/F 24-28	87302040	10	148	60	112	36	65	16	5.5
KDP/F 24-28, PU 100	87302041	10	148	60	112	36	65	16	5.5
KDP/F 24-46	87302050	10	148	60	112	36	65	16	5.5
KDP/F 24-46, PU 100	87302051	10	148	60	112	36	65	16	5.5
KDP/F 24-multi	87302030	10	148	60	112	36	65	16	5.5
KDP/F 24-multi, VE 100	87302031	10	148	60	112	36	65	16	5.5

Material properties



Polypropylene (PP) | Thermoplastic elastomer (TPE) |

Thermal properties



Temperature / temperature range -30 °C – 70 °C
short termshort term: °C

Protection class



Protection class IP65

Fire properties



Fire classification HB



Cable entry plate plastic type KDP/F 24

Technical information


 LABS free

 According to EN -2-1

Conformity

 RoHS (EC Directive 2011/65/EU)

General information

 Made in Germany

All details given in our sales brochures and catalogues, as well as the information available online, are based on our current knowledge of the products described. The electronic data and files made available by Murrplastik, particularly CAD files are based on our current knowledge of the product described. A legally binding assurance of certain properties or the suitability for a certain purpose can not be determined from this information. All information with respect to the chemical and physical properties of Murrplastik products, as well as application advice given verbally, in writing or by tests, is given to the best of our knowledge. They do not release the buyer from the obligation to carry out his own tests and trials in order to determine the concrete suitability of the products for the intended purpose. Murrplastik accepts no responsibility for the available information being up-to-date, correct or complete. Neither do we accept responsibility for the quality of this information. Murrplastik accepts no liability for damage caused as a result of using our products. Murrplastik reserves the right to make technical changes and improvements through constant further development of products and services. Our General Terms and Conditions apply.